

Specificare il tipo di materiale (NBR - VITON) dopo il codice

\_ NBR = 70 Shore - Temperatura da -30°C a +100°C  
\_ VITON = 75 Shore - Temperatura da -20°C a +200°C


Codice	d1xd2
OR 2007	1,78x1,78
OR 2010	2,57x1,78
OR 2012	2,9x1,78
OR 2015	3,69x1,78
OR 2018	4,48x1,78
OR 2021	5,28x1,78
OR 2025	6,07x1,78
OR 106	6,75x1,78
OR 2031	7,66x1,78
OR 108	8,73x1,78
OR 2037	9,25x1,78
OR 2043	10,82x1,78
OR 114	11,11x1,78
OR 2050	12,42x1,78
OR 2056	14x1,78
OR 2062	15,6x1,78
OR 2068	17,17x1,78
OR 2075	18,77x1,78
OR 2081	20,35x1,78
OR 2087	21,95x1,78
OR 2093	23,52x1,78
OR 2100	25,12x1,78
OR 2106	26,7x1,78
OR 2112	28,3x1,78
OR 2118	29,87x1,78
OR 2125	31,47x1,78
OR 2131	33,05x1,78
OR 2137	34,65x1,78
OR 2150	37,82x1,78
OR 2162	41x1,78
OR 2175	44,17x1,78
OR 2187	47,35x1,78
OR 2200	50,52x1,78
OR 2212	53,7x1,78
OR 2225	56,87x1,78
OR 2237	60,05x1,78
OR 2250	63,22x1,78
OR 2262	66,4x1,78
OR 2275	69,57x1,78
OR 2287	72,75x1,78
OR 2300	75,92x1,78
OR 2325	82,27x1,78
OR 2350	88,62x1,78
OR 2375	94,97x1,78
OR 2400	101,32x1,78
OR 2425	107,67x1,78
OR 2450	114,02x1,78
OR 2475	120,37x1,78

Codice	d1xd2
OR 2500	126,72x1,78
OR 2525	133,07x1,78
OR 2103	2,06x2,62
OR 3021	5,23x2,62
OR 3024	6,02x2,62
OR 3030	7,59x2,62
OR 109	9,13x2,62
OR 3037	9,19x2,62
OR 112	9,92x2,62
OR 3043	10,78x2,62
OR 115	11,91x2,62
OR 3050	12,37x2,62
OR 117	13,1x2,62
OR 3056	13,95x2,62
OR 119	15,08x2,62
OR 3062	15,54x2,62
OR 121	15,88x2,62
OR 3068	17,13x2,62
OR 123	17,86x2,62
OR 3075	18,72x2,62
OR 3081	20,24x2,62
OR 128	20,63x2,62
OR 3087	21,89x2,62
OR 130	22,22x2,62
OR 3093	23,47x2,62
OR 132	23,81x2,62
OR 3100	25,07x2,62
OR 3106	26,65x2,62
OR 3112	28,25x2,62
OR 3118	29,82x2,62
OR 3125	31,42x2,62
OR 3131	32,99x2,62
OR 3137	34,6x2,62
OR 3143	36,14x2,62
OR 3150	37,77x2,62
OR 3156	39,34x2,62
OR 3162	40,95x2,62
OR 3168	42,52x2,62
OR 3175	44,12x2,62
OR 3181	45,69x2,62
OR 3187	47,3x2,62
OR 3193	48,89x2,62
OR 3200	50,47x2,62
OR 3206	52,07x2,62
OR 3212	53,65x2,62
OR 3218	55,25x2,62
OR 3225	56,82x2,62
OR 3231	58,42x2,62

Codice	d1xd2
OR 3237	60x2,62
OR 3243	61,6x2,62
OR 3250	63,17x2,62
OR 3256	64,77x2,62
OR 3262	66,35x2,62
OR 3268	67,95x2,62
OR 3275	69,52x2,62
OR 3281	71,12x2,62
OR 3287	72,69x2,62
OR 3300	75,87x2,62
OR 3325	82,22x2,62
OR 3350	88,57x2,62
OR 3375	94,92x2,62
OR 3400	101,27x2,62
OR 3425	107,62x2,62
OR 3450	113,97x2,62
OR 3475	120,32x2,62
OR 3500	126,67x2,62
OR 3525	133,02x2,62
OR 3550	139,37x2,62
OR 3575	145,72x2,62
OR 3600	152,07x2,62
OR 3625	158,42x2,62
OR 3650	164,77x2,62
OR 3675	171,12x2,62
OR 3700	177,47x2,62
OR 3725	183,83x2,62
OR 3750	190,17x2,62
OR 3775	196,52x2,62
OR 3800	202,87x2,62
OR 3825	209,22x2,62
OR 3850	215,57x2,62
OR 3875	221,92x2,62
OR 3900	228,27x2,62
OR 3925	234,62x2,62
OR 3950	240,97x2,62
OR 3975	247,32x2,62
OR 4028	7,51x3,53
OR 4036	9,12x3,53
OR 4050	12,29x3,53
OR 4055	13,87x3,53
OR 4061	15,47x3,53
OR 4067	17,04x3,53
OR 4075	18,64x3,53
OR 4081	20,22x3,53
OR 4087	21,82x3,53
OR 4093	23,4x3,53
OR 4100	24,99x3,53

Codice	d1xd2
OR 134	25,8x3,53
OR 4106	26,58x3,53
OR 4112	28,17x3,53
OR 4118	29,75x3,53
OR 4125	31,34x3,53
OR 4131	32,93x3,53
OR 4137	34,52x3,53
OR 4143	36,1x3,53
OR 4150	37,69x3,53
OR 144	39,69x3,53
OR 4162	40,86x3,53
OR 146	41,28x3,53
OR 147	42,86x3,53
OR 4175	44,04x3,53
OR 149	44,45x3,53
OR 150	46,04x3,53
OR 4187	47,22x3,53
OR 152	47,63x3,53
OR 153	49,21x3,53
OR 4200	50,39x3,53
OR 155	50,8x3,53
OR 156	52,39x3,53
OR 4212	53,57x3,53
OR 158	53,98x3,53
OR 159	55,56x3,53
OR 4225	56,74x3,53
OR 161	57,15x3,53
OR 162	58,74x3,53
OR 4237	59,92x3,53
OR 164	60,33x3,53
OR 165	61,91x3,53
OR 4250	63,09x3,53
OR 167	63,5x3,53
OR 168	65,09x3,53
OR 4262	66,27x3,53
OR 170	66,68x3,53
OR 171	68,26x3,53
OR 4275	69,44x3,53
OR 173	69,85x3,53
OR 174	71,44x3,53
OR 4287	72,62x3,53
OR 176	73,03x3,53
OR 177	74,61x3,53
OR 4300	75,8x3,53
OR 4312	78,97x3,53
OR 4325	82,14x3,53
OR 4337	85,32x3,53
OR 4350	88,5x3,53

ATTENZIONE: gli O-ring vengono forniti in confezioni, la quantità verrà comunicata al momento del preventivo

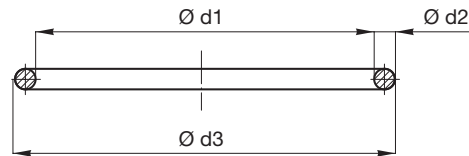

Specificare il tipo di materiale (NBR - VITON) dopo il codice

\_ NBR = 70 Shore - Temperatura da -30°C a +100°C  
 \_ VITON = 75 Shore - Temperatura da -20°C a +200°C

Codice	d1xd2
OR 4362	91,67x3,53
OR 4375	94,84x3,53
OR 4387	98,02x3,53
OR 4400	101,2x3,53
OR 4412	104,4x3,53
OR 4425	107,5x3,53
OR 4437	110,7x3,53
OR 4450	113,9x3,53
OR 4462	117,1x3,53
OR 4475	120,2x3,53
OR 4487	123,4x3,53
OR 4500	126,6x3,53
OR 4512	129,8x3,53
OR 4525	132,9x3,53
OR 4537	136,1x3,53
OR 4550	139,3x3,53
OR 4562	142,5x3,53
OR 4575	145,6x3,53
OR 4587	148,8x3,53
OR 4600	152x3,53
OR 4625	158,3x3,53
OR 4650	164,7x3,53
OR 4675	171x3,53
OR 4700	177,4x3,53
OR 4725	183,7x3,53
OR 4750	190,1x3,53
OR 4775	196,4x3,53
OR 4800	202,8x3,53
OR 4825	209,1x3,53
OR 4850	215,5x3,53
OR 4875	221,8x3,53
OR 4900	228,2x3,53
OR 4925	234,5x3,53
OR 4950	240,9x3,53
OR 4975	247,2x3,53
OR 41000	253,6x3,53
OR 41050	266,29x3,53
OR 41100	278,99x3,53
OR 41150	291,69x3,53
OR 41200	304,39x3,53
OR 41300	329,79x3,53
OR 41400	355,19x3,53
OR 41500	380,59x3,53
OR 41600	405,26x3,53
OR 41700	430,66x3,53
OR 41800	456,06x3,53
OR 6150	37,47x5,34
OR 6162	40,65x5,34

Codice	d1xd2
OR 6175	43,82x5,34
OR 6187	47x5,34
OR 6200	50,16x5,34
OR 6212	53,34x5,34
OR 6225	56,52x5,34
OR 6237	59,69x5,34
OR 6250	62,87x5,34
OR 6262	66,04x5,34
OR 6275	69,22x5,34
OR 6287	72,39x5,34
OR 178	74,63x5,34
OR 6300	75,57x5,34
OR 6312	78,74x5,34
OR 181	79,77x5,34
OR 6325	81,92x5,34
OR 6337	85,09x5,34
OR 6350	88,27x5,34
OR 185	89,69x5,34
OR 6362	91,44x5,34
OR 6375	94,62x5,34
OR 6387	97,79x5,34
OR 189	100x5,34
OR 6400	101x5,34
OR 6412	104,1x5,34
OR 6425	107,2x5,34
OR 193	109,5x5,34
OR 6437	110,5x5,34
OR 6450	113,7x5,34
OR 199	117,5x5,34
OR 201	120,7x5,34
OR 203	123,8x5,34
OR 206	127x5,34
OR 208	130,2x5,34
OR 210	133,4x5,34
OR 213	136,5x5,34
OR 215	139,7x5,34
OR 217	142,9x5,34
OR 219	146,1x5,34
OR 221	149,2x5,34
OR 6600	151,77x5,34
OR 6625	158,11x5,34
OR 6645	164,46x5,34
OR 6670	170,82x5,34
OR 6700	177,16x5,34
OR 6720	183,51x5,34
OR 6745	189,86x5,34
OR 6775	196,21x5,34
OR 6795	202,56x5,34

Codice	d1xd2
OR 6820	208,91x5,34
OR 6850	215,26x5,34
OR 6870	221,61x5,34
OR 6895	227,96x5,34
OR 6920	234,31x5,34
OR 6945	240,66x5,34
OR 6975	247,01x5,34
OR 6995	253,36x5,34
OR 61050	266,06x5,34
OR 61100	278,76x5,34
OR 61150	291,46x5,34
OR 61200	304,16x5,34
OR 61300	329,5x5,34
OR 61400	354,96x5,34
OR 61500	380,36x5,34
OR 61600	405,26x5,34
OR 61700	430,66x5,34
OR 61800	456,06x5,34
OR 61900	481,41x5,34
OR 62000	506,81x5,34
OR 62100	532,2x5,34
OR 8450	113,7x6,99
OR 197	114,7x6,99
OR 8462	116,8x6,99
OR 8475	120x6,99
OR 8487	123,2x6,99
OR 204	124,6x6,99
OR 8500	126,4x6,99
OR 8512	129,5x6,99
OR 8525	132,7x6,99
OR 211	134,5x6,99
OR 8537	135,9x6,99
OR 8550	139,1x6,99
OR 8562	142,2x6,99
OR 8575	145,4x6,99
OR 8587	148,6x6,99
OR 8600	151,8x6,99
OR 223	155,6x6,99
OR 8625	158,1x6,99
OR 225	159,5x6,99
OR 226	161,9x6,99
OR 8650	164,5x6,99
OR 228	166,7x6,99
OR 229	168,3x6,99
OR 8675	170,8x6,99
OR 231	174,6x6,99
OR 8700	177,2x6,99
OR 233	181x6,99

Codice	d1xd2
OR 8725	183,5x6,99
OR 235	187,3x6,99
OR 8750	189,9x6,99
OR 237	193,7x6,99
OR 8775	196,2x6,99
OR 239	200x6,99
OR 8800	202,6x6,99
OR 8825	208,9x6,99
OR 8850	215,4x6,99
OR 8875	221,6x6,99
OR 8900	227,9x6,99
OR 8925	234,3x6,99
OR 8950	240,7x6,99
OR 8975	247x6,99
OR 81000	253,3x6,99
OR 81025	259,7x6,99
OR 81050	266,1x6,99
OR 81075	272,4x6,99
OR 81100	278,7x6,99
OR 81125	285,2x6,99
OR 81150	291,5x6,99
OR 81175	297,8x6,99
OR 81200	304,1x6,99
OR 81250	316,9x6,99
OR 81300	329,5x6,99
OR 81350	342,3x6,99
OR 81400	354,9x6,99
OR 81450	367,7x6,99
OR 81500	380,3x6,99
OR 81550	393,1x6,99
OR 81600	405,3x6,99
OR 81650	418x6,99
OR 81700	430,7x6,99
OR 81750	443,4x6,99
OR 81800	456,1x6,99
OR 81850	468,8x6,99
OR 81900	481,5x6,99
OR 81950	494,2x6,99
OR 82000	506,9x6,99
OR 82100	532,3x6,99
OR 82200	557,7x6,99
OR 82300	582,7x6,99
OR 82400	608,1x6,99
OR 82500	633,5x6,99
OR 82600	658,9x6,99

ATTENZIONE: gli O-ring vengono forniti in confezioni, la quantità verrà comunicata al momento del preventivo